


Products

– Energy Control & Management

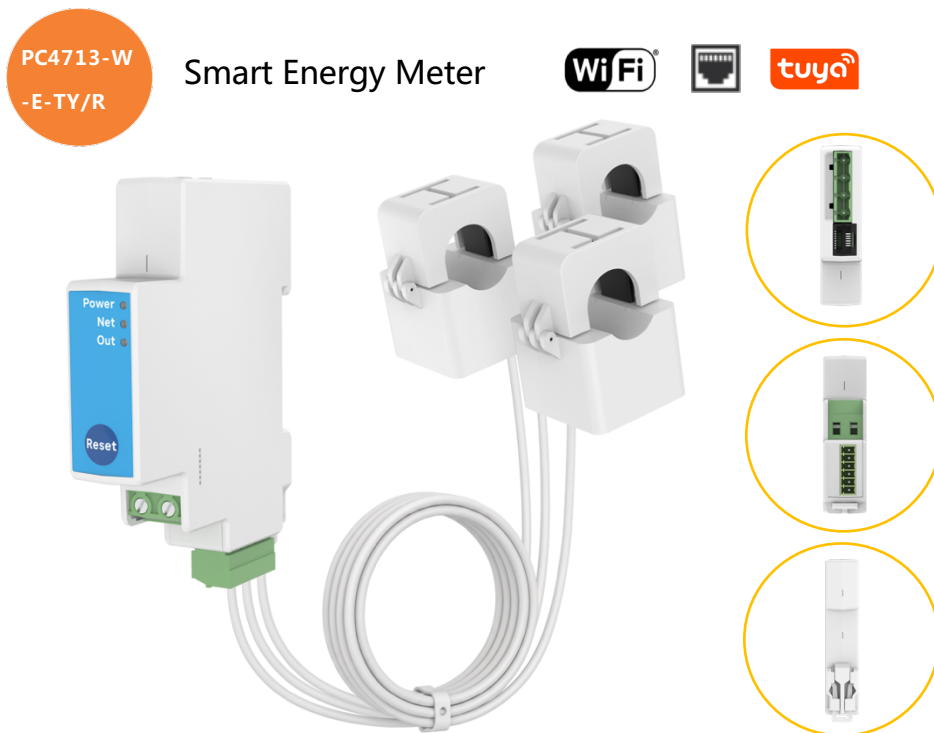

Description

Smart energy meter TrioClip Pro (PC4713-W-E-TY/R) helps you monitor the amount of electricity Consumed and Produced in your three-phase power system by connecting the clamps on to the power cables. It is also compatible with split-phase and single-phase. It allows you to turn On/Off of relay and check real-time or historical energy data via mobile App.

Main Features

- TUYA compliant, supporting automation scenarios and HA platform integration
- Three-Phase Four-Wire, Split-Phase and Single-Phase system compatible
- Remotely monitor whole home Energy with three current transformers
- Wi-Fi communication, fast configuration, suitable for environments with inconvenient wiring.
- Ethernet communication, adapt to environments with poor wireless signals, and improve network stability
- Real-time Voltage, Current, PowerFactor, Frequency, ActivePower, ReactivePower, ApparentPower measurement
- Bidirectional measurement: Energy Usage / Solar Production
- Historical data could be displayed and exported in App
- Dry contact relay, resistive current rated 3A, max.5A, overload protection and relay setting
- Offline energy data storage function, automatically reporting data after network reconnection
- Functions such as Data Erasure, remote Reboot, CT Setting, Phase Sequence Error Alarm, etc

Main Specifications

Connectivity	
Wi-Fi	• 802.11 b/g/n @2.4GHz
BLE	• For Pairing
Ethernet	• 10/100 Mbps
Physical Specifications	
Un	• 3x230/400V AC, 50/60Hz
Voltage Range	• 90-277 V
Supported Systems	• Single-Phase • Split-Phase • Three-Phase (3-Phase 3-Wire & Delta system are not supported)
Power Consumption	• < 2W
Voltmeters Accuracy	• $\pm 1\%$
Ammeters Accuracy	• 80A CT: $\pm 1\%$ (1-80A) , $\pm 2\%$ (0-1A) • 120A CT: $\pm 1\%$ (2-120A) , $\pm 2\%$ (0-2A) • 200A CT: $\pm 1\%$ (2-200A) , $\pm 2\%$ (0-2A) • 300A CT: $\pm 1\%$ (6-300A) , $\pm 2\%$ (2-6A) , $\pm 5\%$ (0-2A) • 500A CT: $\pm 1\%$ (6-500A) , $\pm 2\%$ (2-6A) , $\pm 5\%$ (0-2A) • 750A CT: $\pm 1\%$ (6-750A) , $\pm 2\%$ (2-6A) , $\pm 5\%$ (0-2A)
Clamp Inner Dimension	• 80A (optional): $\varnothing 10\text{mm}$ • 120A(default): $\varnothing 16\text{mm}$ • 200A(optional): $\varnothing 20\text{mm}$ • 300A(optional): $\varnothing 24\text{mm}$ • 500A(optional): $\varnothing 36\text{mm}$ • 750A(optional): $\varnothing 51\text{mm}$
Relay Type	• Dry contact relay, resistive current rated 3A, max.5A
Reporting Cycle	• Energy data: every 15 seconds • Relay status: immediately
Operating Environment	• Temperature: $-20\text{ }^{\circ}\text{C} \sim +55\text{ }^{\circ}\text{C}$ • Humidity: $\leq 90\%$ non-condensing
Mount Type	• 35mm DIN rail mounting
Dimension	• 19(W) x 69(D) x 90(H)mm
Certification	• CE

